


C00系列
卧式气控快装
3PC球阀



技术参数

产品规格：1/2"-6"
 阀体结构：直通式全包结构
 工作压力：10bar
 控制压力：5-7bar
 阀体材质：CF8/CF8M/304/316/316L
 密封材质：PTFE
 驱动方式：单/双作用
 连接方式：3A快装、焊接
 内部处理：内表面CNC加工、Ra0.6um
 温度范围：-20°C~150°C
 应用范围：主要应用于食品加工、饮料、酿酒、生物制药等

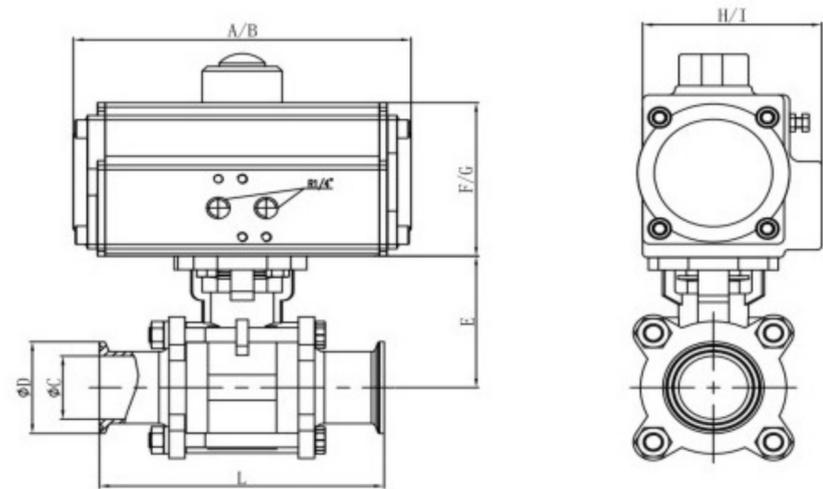


快装式

外形尺寸(快装式)

规格	A/B (单/双)	C ±0.06	D ±0.06	E ±0.3	F/G (单/双)	H/I (单/双)	L ±0.3	单作用 执行器	双作用 执行器	扭矩 N.m
1/2"	169/154	9.4	25.2	37	88/72	82/71	90.5	AT63	AT52	4~10
3/4"	169/154	15.75	25.2	43	88/72	82/71	103.4	AT63	AT52	4~10
1"	201/169	22.1	50.5	51	100/88	94/82	114.2	AT75	AT63	5~15
1.25"	201/169	28.5	50.5	61	100/88	94/82	126	AT75	AT63	10~20
1.5"	209/201	34.8	50.5	71	108/100	101/94	136.7	AT83	AT75	10~25
2"	275/209	47.5	64	79	133/108	122/101	153.2	AT105	AT83	15~30
2.5"	275/209	60.2	77.5	94	133/108	122/101	167.3	AT105	AT83	20~35
3"	332/275	72.9	91	109.5	155/133	138/122	192.3	AT125	AT105	40~65
4"	385/332	97.4	119	123	172/155	153/138	239.5	AT140	AT125	40~80
6"	507/450	146.8	166.8	169	230/197	206/174	378	AT190	AT160	60~120

球阀

C00系列
卧式气控焊接
3PC球阀

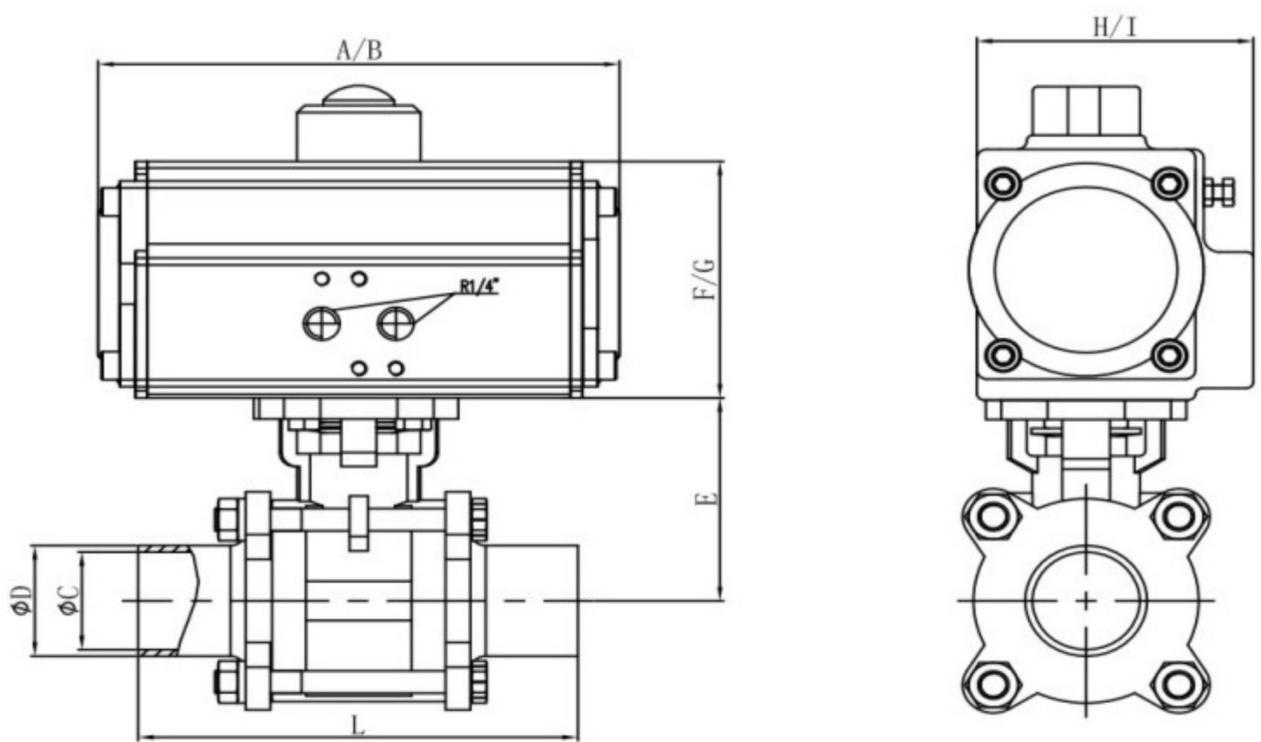

焊接式

外形尺寸(焊接式)

规格	A/B (单/双)	C ±0.06	D ±0.06	E ±0.3	F/G (单/双)	H/I (单/双)	L ±0.3	单作用 执行器	双作用 执行器	扭矩 N.m
1/2"	169/154	9.4	12.7	37	88/72	82/71	90.5	AT63	AT52	4~10
3/4"	169/154	15.75	19.05	43	88/72	82/71	103.4	AT63	AT52	4~10
1"	201/169	22.1	25.4	51	100/88	94/82	114.2	AT75	AT63	5~15
1.25"	201/169	28.5	31.8	61	100/88	94/82	126	AT75	AT63	10~20
1.5"	209/201	34.8	38.1	71	108/100	101/94	136.7	AT83	AT75	10~25
2"	275/209	47.5	50.8	79	133/108	122/101	153.2	AT105	AT83	15~30
2.5"	275/209	60.2	63.5	94	133/108	122/101	167.3	AT105	AT83	20~35
3"	332/275	72.9	76.2	109.5	155/133	138/122	192.3	AT125	AT105	40~65
4"	385/332	97.4	101.6	123	172/155	153/138	239.5	AT140	AT125	40~80
6"	507/450	146.8	152.4	169	230/197	206/174	378	AT190	AT160	60~120

订货说明

